


eHeat[®] Gutter

Self-regulating parallel heating tape

up to 85°C

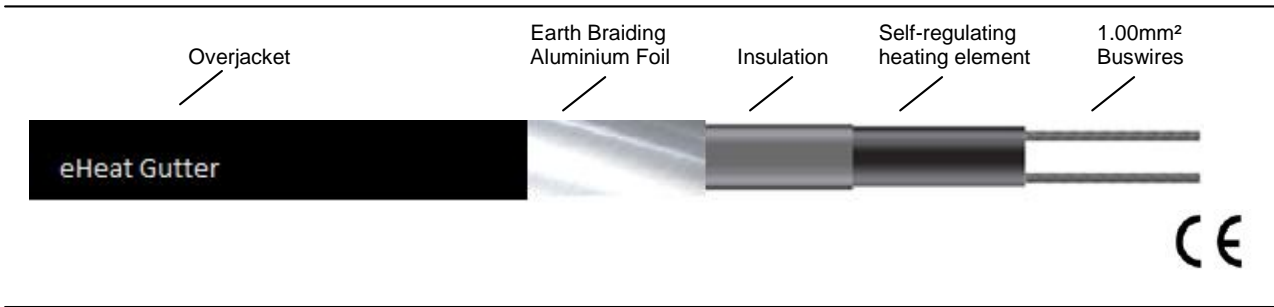

Description of heating tape

- Self-regulating
- Special designed for roof and gutter heating applications
- UV protected overjacket

Technical data

Maximum exposure temperature (unpowered):	85°C
Maximum operating temperature:	65°C
Nominal voltage:	230 V
Min. bending radius:	35 mm
Min. installation temperature:	- 30°C

Name	Power output on insulated metal pipes at 5°C (W/m)	Maximum permissible temperature (°C)	Nominal Dimension
eHeat Gutter	23*	85	10.5 x 5.9

* 40W/m at 0°C in ice water

Maximum recommended length of heating circuit at 230VAC using Type-C circuit breakers:

Product Reference	Circuit Breaker	Start up Temperature			
		+10°C	0°C	-10°C	-20°C
eHeat Gutter	16A	85m	80m	70m	60m
eHeat Gutter	20A	110m	100m	88m	80m
eHeat Gutter	25A	128m	118m	100m	90m